
SIZE	FILTER	CAPACITANCE		VOLTAGE		CURRENT	CONTACT	MIN	MINIMUM ATTENUATION ((dE	3)			
	TYPE	MIN	MAX	WVDC	DWV	RATING	RESISTANCE	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
15	С	100	200	100	250	5A	.010 Ohms					1	6	14	19

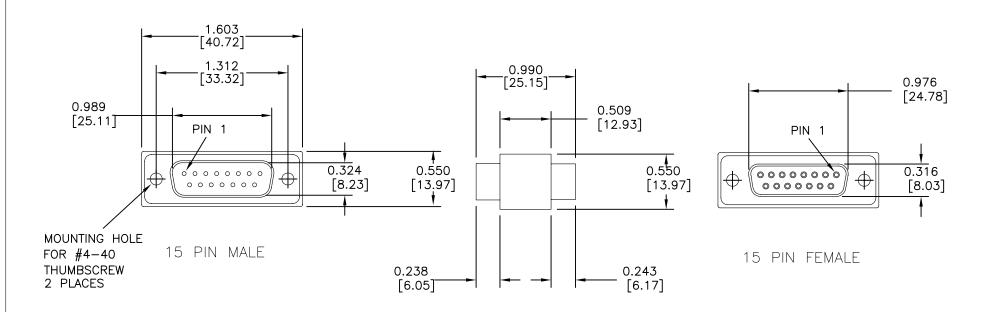

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-VO.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

	ALL DIMENSIONS ARE IN INCHES (mm)	One Plastics Rd. – Corry, PA 16407 (814) 664–7728 FAX (814) 664–4582						
C.O. 2710	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED	www.cormic.com						
	DECIMAL: ± .025 [.64] ANGLES: ± 1°	Dwg By: RPM Date: 08/12/05 Chk'd By: RPM Scale: 1X File: Sheet:						
12/05 12/05	CAGE CODE	15 PIN, ADAPTER, 100 PF "C"						
780	15717	DSC15-300-A00						