
SIZE	FILTER	CAPACITANCE		VOLTAGE		CURRENT	CONTACT	MII	MINIMUM ATTENUATION (de				(dE	3)	
	TYPE	MIN	MAX	WVDC	DWV	RATING	RESISTANCE	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
15	Pi	2500	5000	100	250	5A	.010 Ohms	8	13	18	33	45	58	70	70

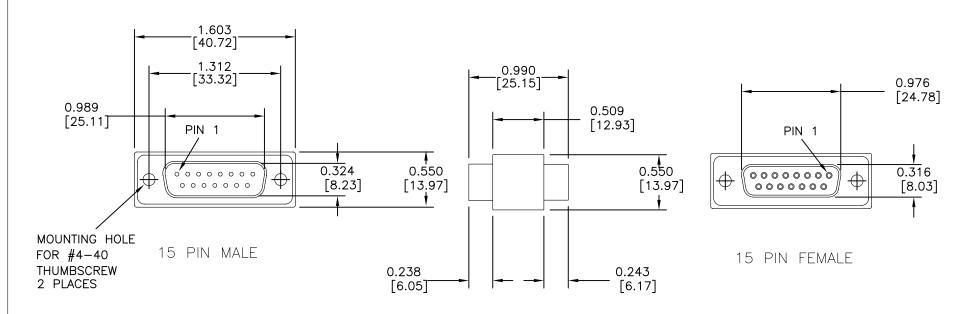

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-VO.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

	ALL DIMENSIONS ARE IN INCHES (mm)	One Plastics Rd. – Corry, PA 16407 (814) 664–7728 FAX (814) 664–4582
C.O. 2710	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL: ± .025 [.64]	Dwg By: RPM Date: 08/12/05 Chk'd By: RPM
(02)	ANGLES: ± 1°	Scale: 1X File: Sheet:
DAT DAT	CAGE CODE 15717	15 PIN, ADAPTER, 2500 PF "Pi" DSP15-300-J00