
SIZE	FILTER	CAPACITANCE (pF)		VOLTAGE		CURRENT	CONTACT	MINIMUM ATTENUATION ((dE	3)			
	TYPE	MIN	MAX	WVDC	DWV	RATING	RESISTANCE	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz
37	Pi	4000	8000	100	250	5A	.010 Ohms	9	15	28	41	53	66	70	70

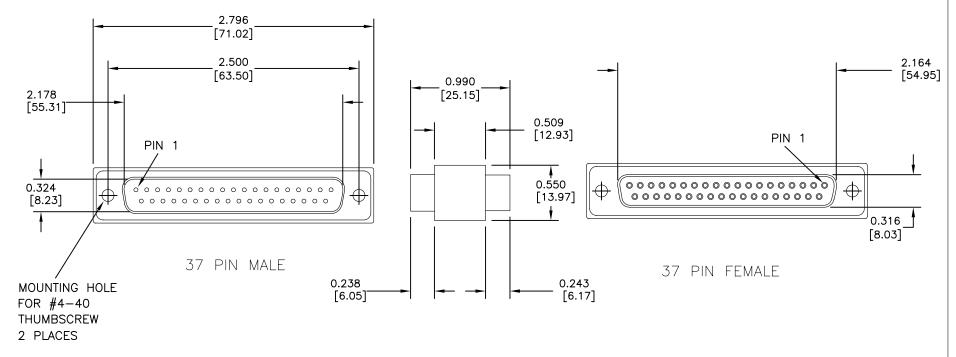

NOTES

- 1) SHELLS: STEEL, TIN PLATED.
- 2) CONTACTS: COPPER ALLOY, GOLD PLATED, .000010" TYP.
- 3) INSULATORS AND BACK COVER: PLASTIC, UL94-VO.
- 4) MATING SHELL (MALE SIDE) HAS GROUNDING DIMPLES.
- 5) OPERATING TEMPERATURE: -55°C TO +125°C.
- 6) MARKING: PART NUMBER IS INK STAMPED ON REAR COVER.
- 7) EACH UNIT INCLUDES TWO #4-40 THUMBSCREWS (NOT SHOWN). EACH THUMBSCREW IS CAPTIVE WITHIN THE MOUNTING HOLES.

O RE	ALL DIMENSIONS ARE IN INCHES (mm)	One Plastics Rd. – Corry, PA 16407 (814) 664–7728 FAX (814) 664–4582					
C.O. 2710	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED	www.cormic.com					
	DECIMAL: ± .025 [.64]	Dwg By: RPM Date: 08/12/05 Chk'd By: RPM					
V05	ANGLES: ± 1°	Scale: 1X File: Sheet:					
)ATE	CAGE CODE	37 PIN, ADAPTER, 5000 PF "Pi"					
] /80	15717	DSP37-300-K00					