


Product Specification

FTF20-08 RFI FILTER

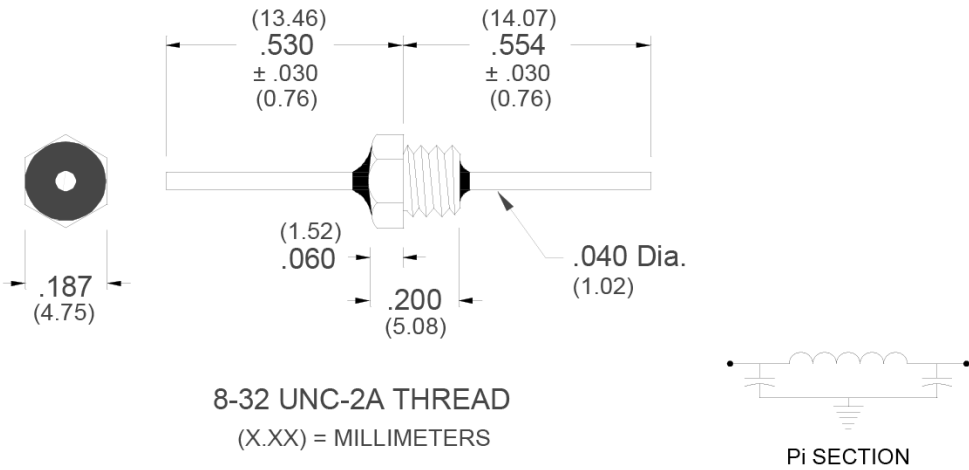

- Capacitance: 1000 pF Min.
- Dissipation Factor: 5% Max.
- Working Volts DC: 100*
- Dielectric Withstanding Voltage: 250 VDC, 2 Seconds
- Insulation Resistance @ 25°C : 10 GΩ Min.
- Max. Current: 10 Amps DC
- DC Resistance: .01Ω Max.
- Operating Temperature: -55 °C - +85 °C
- Recommend Mounting Torque: 3-5 Inch/Lbs. Max.

Insertion Loss:

- 10 MHz / 5 dB
- 100 MHz / 42 dB
- 1 GHz / 65 dB

Materials:

- Case: Silver Plated Per QQ-S-365A
- Lead: Silver Plated Per QQ-S-365A
- Epoxy Sealed, Both Ends

