



Product Specification

FTF3-02 RFI FILTER

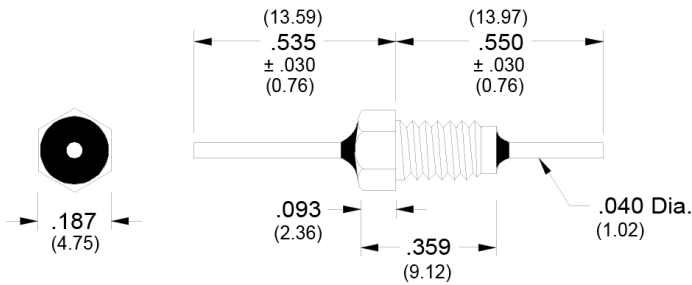

8-32 UNC-2A THREAD
(X.XX) = MILLIMETERS



- Capacitance: 1500 pF Min.
- Dissipation Factor: 5% Max.
- Working Volts DC: 200*
- Dielectric Withstanding Voltage: 500 VDC, 2 Seconds
- Insulation Resistance @ 25°C : 10 GΩ Min.
- Max. Current: 10 Amps DC
- DC Resistance: .01Ω Max.
- Operating Temperature: -55 °C - +125 °C
- Recommend Mounting Torque: 4-6 Inch/Lbs. Max.

Insertion Loss:

- 10 MHz / 5 dB
- 100 MHz / 42 dB
- 1 GHz / 70 dB

Materials:

- Case: Silver Plated Per QQ-S-365A
- Lead: Silver Plated Per QQ-S-365A
- Epoxy Sealed, Both Ends

