


## FP05 Style Filter Plate

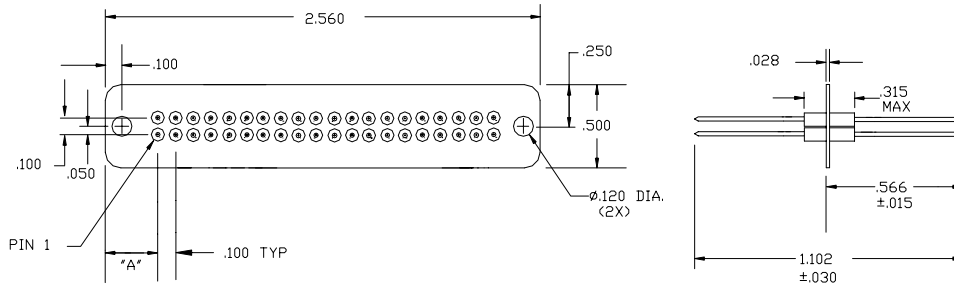

### Materials:

Plate: Copper Alloy, Matte Tin Plated

Leads: Copper Alloy, .025" ± .002" Dia, Gold Plated

Working Voltage: 100 VDC

Max. Current: 5 Amps DC

Insulation Resistance @ 25 °C: 10 GΩ Min.

Operating Temperature: -55 °C - +125 °C

Filtering Options: See Filter Options Chart

Lead Configurations: See Lead Options Chart

### Ordering Information:

No. of Filtered Lines Per Row	"A"
5 or 6	1.030
7 or 8	.930
9 or 10	.830
11 or 12	.730
13 or 14	.630
15 or 16	.530
17 or 18	.430
19 or 20	.330

Style	# of Rows	# of Filters Per Row	Lead Configuration	Filter Design
FP05 -	2 (1 or 2)	20 (01 thru 20)	- (S,L,R, or B)	- Q (See Filter Options)

Example: Part Number: FP05 -220-SQ  
Description: FP05 Style Plate, 2 rows of 20, Straight Leads, 1000 pF "Pi" Circuit.

Unless otherwise specified, single row designs utilize the bottom row.  
For custom lead configurations consult the factory.

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407 (814) 664-7728 Fax (814) 664-4582**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with it's intended use. CMI also reserves the right to change this document without notice.