



### FTF2-01 RFI FILTER

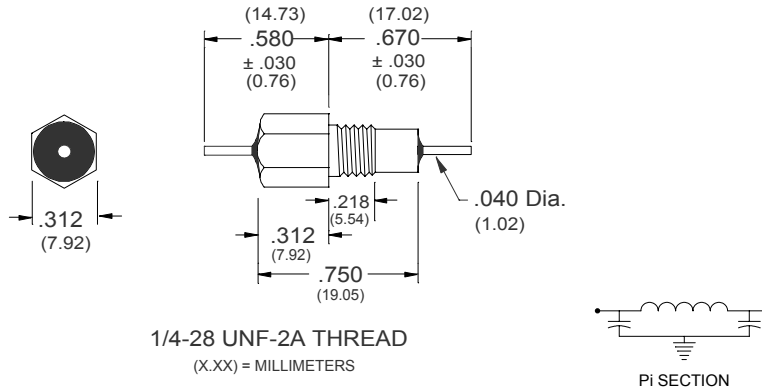

Capacitance: 8000 pF Min.  
 Dissipation Factor: 5% Max.  
 Working Volts DC: 1500\*  
 Dielectric Withstanding Voltage: 3000 VDC, 2 Seconds  
 Insulation Resistance @ 25°C : 10 GΩ Min.  
 Max. Current: 10 Amps DC  
 DC Resistance: .01Ω Max.  
 Operating Temperature: -55 °C - +85 °C  
 Recommend Mounting Torque: 8 Inch/Lbs. Max.  
 Insertion Loss:

10 MHz	30 dB
100 MHz	60 dB
1GHz	60 dB

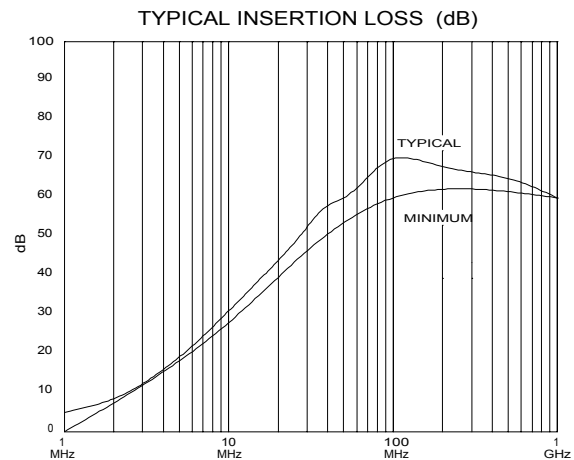

#### Materials:

Case: Silver Plated Per QQ-S-365A  
 Lead: Silver Plated Per QQ-S-365A  
 Epoxy Sealed, Both Ends

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(814) 664-7728 Fax (814) 664-4582 [www.cormic.com](http://www.cormic.com)**