




# CORRY MICRONICS, INC PRODUCT SPECIFICATION

## CMIBF-7144X250-1 Cavity Filter

### Electrical Specifications

Parameters	Specifications
Frequency Range	7019.5~7269.5MHz
Insertion Loss	≤1.5dB
VSWR	≤1.5:1
Rejection	≥20dB@6000~6980MHz ≥30dB@7325~8000MHz
Input Power	10W
Port Connectors	SMA-Female
Impedance	50 Ω
Operating Temp.	-10°C~+60°C
Surface Finish	Silver
Dimensions	See Attached Drawing (Dimensions are in inches [mm])

### Outline Drawing

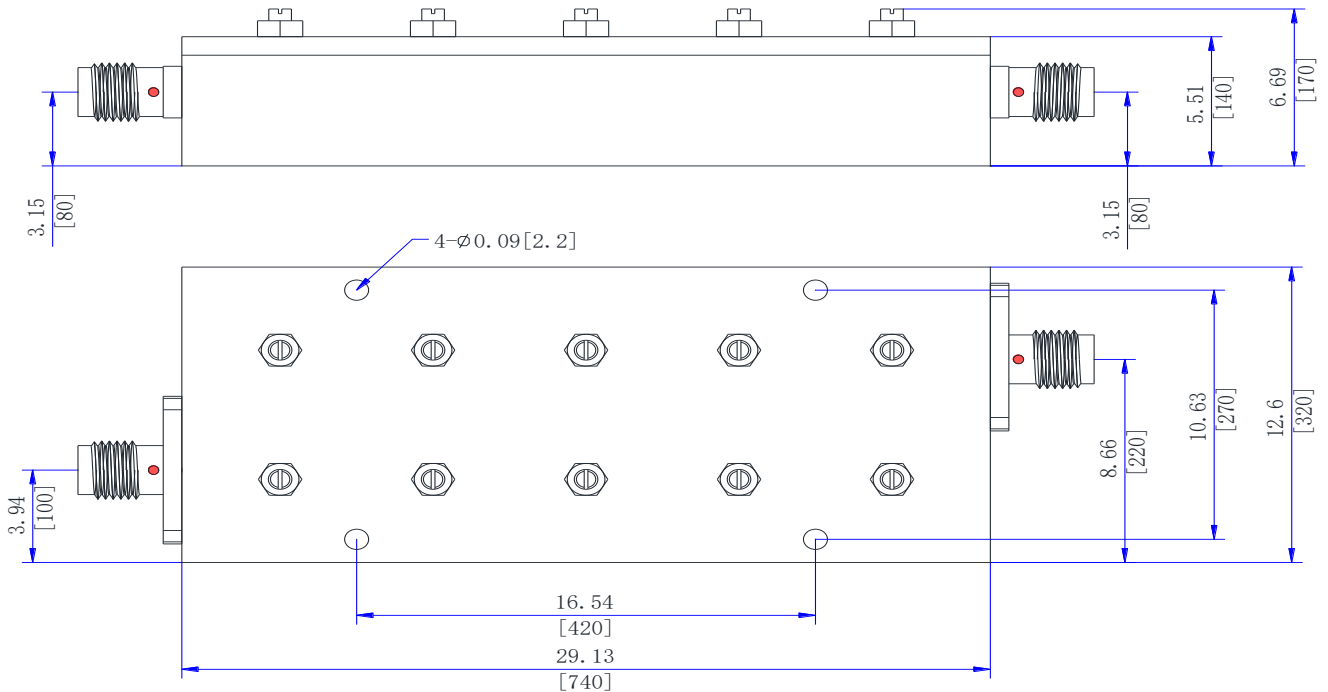

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 [www.cormic.com](http://www.cormic.com)**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 06/25/2018