




CMIBF-7500X500-1 Band Pass Filter

Electrical Specifications

Parameters	Specifications
Center Frequency	7500MHz
Pass Band Frequency	7250~7750MHz
Insertion Loss	≤1.75dB
VSWR	≤1.5:1
Rejection	≥30dB@7900~8400MHz
Connectors	SMA-Female
Power Handling	5W
Operating Temperature	-20°C~+50°C
Surface Finish	Black Paint
Dimensions	See Attached Drawing (Dimensions are in inches[mm])

Outline Drawing

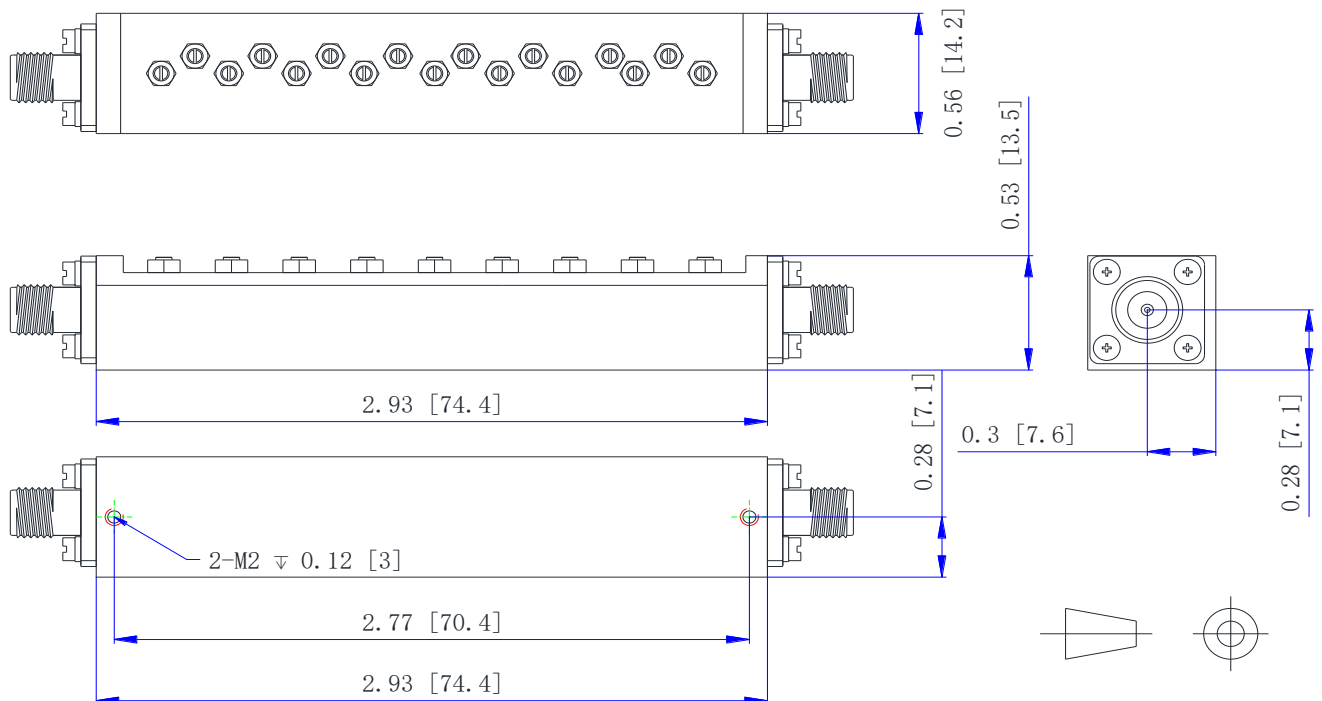

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 05/29/2018