



CORRY MICRONICS, INC PRODUCT SPECIFICATION


**CMIBF-9500X1000-1**

**Cavity Filter**

**Electrical Specification**

Parameters	Specifications
Frequency Range	9000~10000MHz
Insertion Loss	≤0.8dB
VSWR	≤1.5:1
Rejection	≥60dB@DC~8000MHz ≥60dB@1100~13000MHz
Power Handling	300W CW; 1000W Peak, 0.01% duty cycle
Connectors	N-Female
Ports Impedance	50 Ohms
Temperature	-20°C~+65°C
Surface Finish	Silver
Dimensions	See Attached Drawing (Dimensions are in inches [mm])

**Outline Drawing**

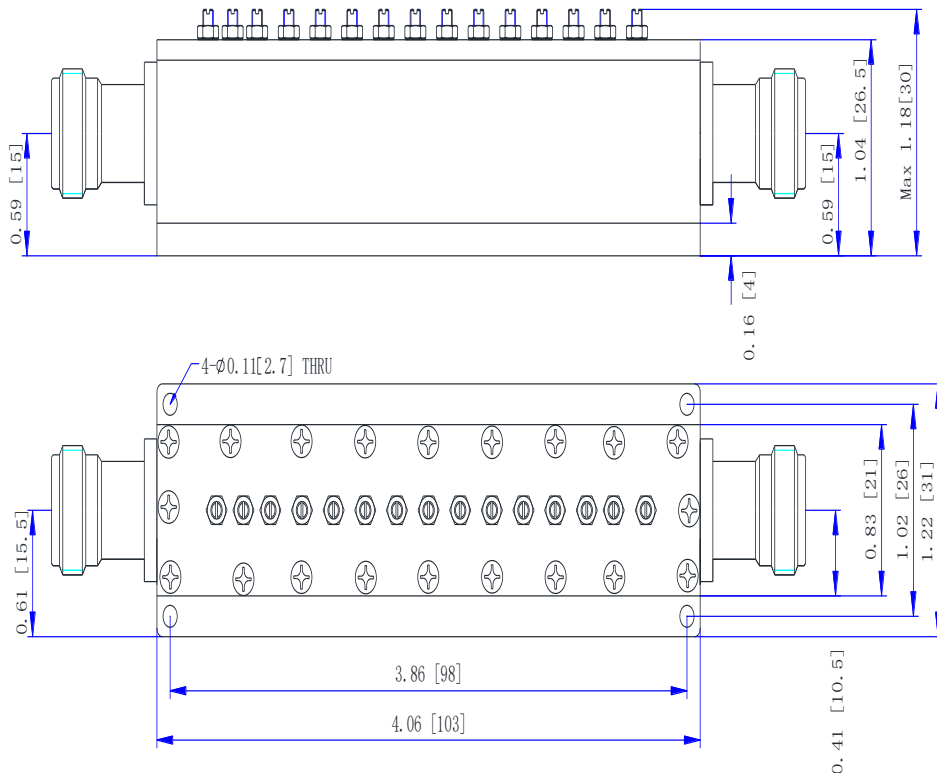

**CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.**

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407**  
**(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com**

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 05/29/2018