



FT40-01-402P/C SPANNER FEEDTHRU

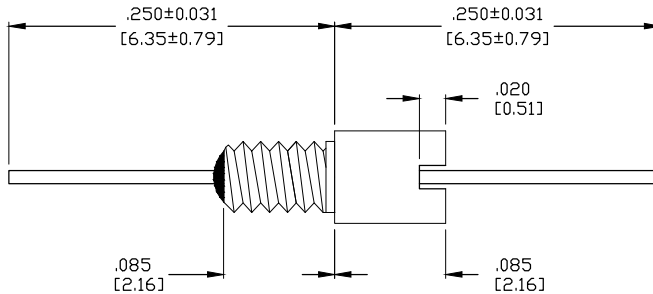

#0-80 UNF-2A THREAD
[X.XX = MILLIMETERS]

Materials:

Case: C12L15 Cold Rolled Steel
Lead: UNS-C-10200 Oxygen Free Copper.
Finish: Silver Plated.
Epoxy Sealed, Both Ends.

Mounting Torque: 10 in-oz Max.

Maximum Soldering Temperature: 260°C
Operating Temperature: -55°C to +125°C.
Insulation Resistance @ 25°C: 10GΩ Min.
Dissipation Factor: 3.5% Max.
Current Rating: 1 Amp DC Max.

PART NUMBER	CAPACITANCE 1 KHz 1 Vrms	TOLERANCE	WVDC (Max)	DWV (5 Sec)	TYPICAL NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220			
					10 MHz	100 MHz	1 GHz	10 GHz
FT40-01-402P/C	4000 pF	-0% +100%	50	125	14	28	48	60

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

**Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(814) 664-7728 Fax (814) 664-4582 www.cormic.com**

Corry Micronics Inc, herein referred to as CMI, believes this information to be accurate, but makes no warranties, expressed or implied, as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential, arising from the use of our products. User assumes all risk whatsoever, in connection with it's intended use. CMI also reserves the right to change this document without notice.