




CORRY MICRONICS, INC PRODUCT SPECIFICATION

CMIBPF-2.62-2.69G

Band Pass Filter

Parameter	Specification
Frequency Range	2.62 – 2.69 GHz
Insertion Loss	3 dB
Pass Band Ripple	±0.5 dB
VSWR	1.5
Rejection @ 2F0GHz	60 dB
Rejection @ 3F0GHz	50 dB
Storage Temperature	-55° - +95°C
Operating Temperature	-40° - +85° C
Impedance	50Ω
Connectors	SMA, Female
Finish	Chemical Film

Outline Drawing

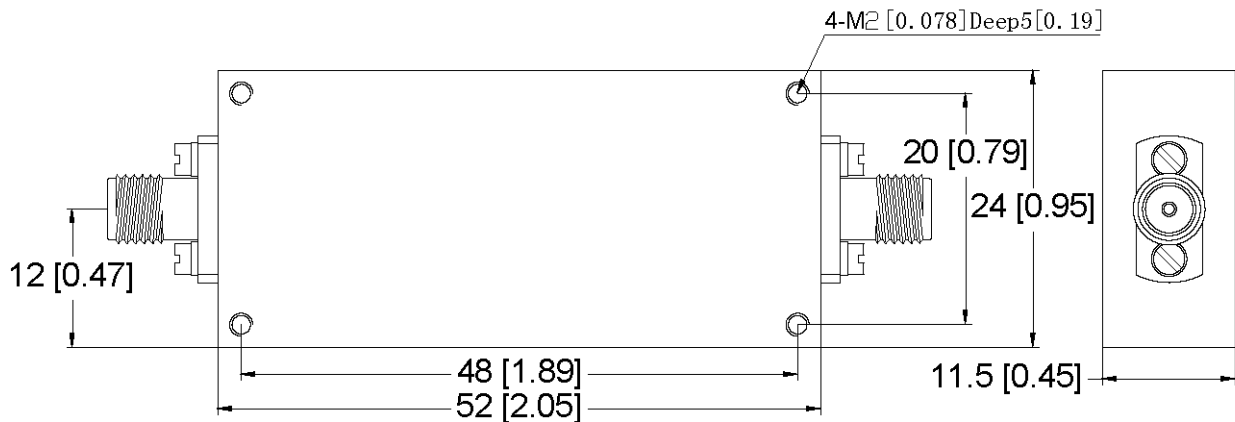

1. Dimensions are in mm [Inches]
2. Tolerances: Outline drawing: ±0.3 [0.011]
Hole: ±0.2 [0.008]

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407
(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 4/15/2019