



CORRY MICRONICS, INC PRODUCT SPECIFICATION

**CMIDU-915-960-X
Diplexer**

Electrical Specifications

Parameters	Specifications
Frequency Range Band 1	905-925 MHz
Frequency Range Band 2	950-970 MHz
Insertion Loss	≤1.0dB
Isolation Band 1	DC-850 MHz -70 dB min 950 - 980 MHz -40dB min 980 - 3000MHz -70dB min
Isolation Band 2	DC-895 MHz -70 dB min 895 - 925 MHz -40dB min 1025 - 3000MHz -70dB min
VSWR	≥1.35:1
Power Handling	20 Watts
Ports Impedance	50 Ω
Operating Temperature	-40°C~+85°C
Material	-A Aluminum -P Plastic
Connectors	SMA-Female
Weight	-A (Aluminum) 21oz -P (Plastic) 11oz
Dimensions	See Drawing

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407


(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 11/20/2018



CORRY MICRONICS, INC PRELIMINARY SPECIFICATION

Mechanical Drawing

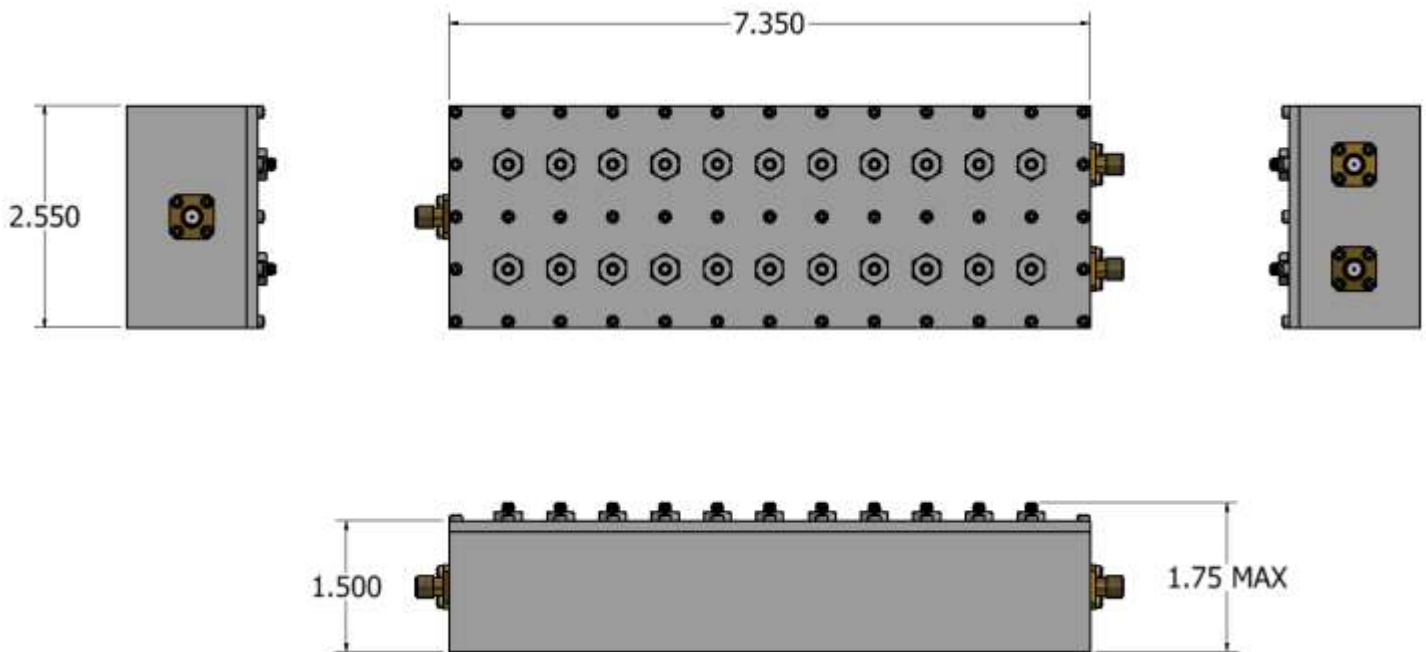

CALL OUR SALES DEPARTMENT FOR MORE INFORMATION OR VARIATIONS OF THIS PRODUCT.

Corry Micronics, Inc. One Plastics Rd. - Corry, PA 16407

(724) 940-7556 ext. 138 Fax (724) 940-7707 www.cormic.com

Corry Micronics Inc. herein referred to CMI, believes this information to be accurate, but makes no warranties, expressed or implied as to the accuracy of this document. CMI assumes no liability for any injury, loss, damage, direct or consequential arising from the use of our products. User assumes all risk whatsoever in connection with its intended use. CMI also reserves the right to change this document without notice. 11/19/2018